

# DD100170 Series

8 mm PRO Proximity Probe Driver for Eddy Current Probe, 4-20 mA Output



PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

PRO Line Proximity Drivers pair with PRO Line Proximity Probes to offer configurable machinery protection with high quality components and industry best lead time.

4-20mA current loop provides power to the driver, and a current output proportional to Dynamic Displacement

- ▶ Isolated voltage output standard at BNC and terminal block Vout and Com
- ▶ Isolated voltage output at the BNC
- ▶ Upgraded to include SecureLock connector

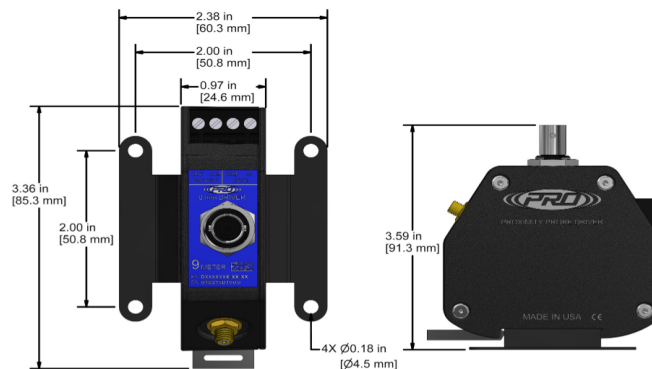

## Specifications

Temperature Range	-49°F (-45°C) to 189°F (85°C)
Enclosure	Aluminum
Probe Connector	SecureLock
Power & Output Connector	4 Position Terminal Block & BNC
Input Voltage	-17.5 to -30 VDC
Linear Range	10-90 mils (0.25 - 2.30 mm)
Nominal Voltage Output	-200 mV/mil (-7.87 V/mm)
4-20 mA Output Proportional To	Dynamic Displacement

## Built to Order

## Optional Regulatory Approvals

### US & Canada (CSA):

Class I Division 1 Groups A, B, C, D  
 Class II Division 1 Group E, F, G  
 Class III  
 Class I Zone 0 AEx ia IIC  
 Class I Division 2 Groups A, B, C, D  
 Class II Division 2 Groups E, F, G  
 Ex ia IIC Ga

### ATEX:

SIRA 16ATEX2084X  
 Ex ia IIC

### International (IECEX):

IECEX CSA 16.0017X  
 Ex ia IIC

### Temperature Codes:

T4 = -45°C to 100°C  
 T5 = -35°C to 85°C



CSA, ATEX, IECEX Approvals Require Intrinsically Safe Barrier Driver must be mounted in a NEMA 4x and/or IP6x enclosure  
**FOR REFERENCE ONLY, PLEASE REFER TO CONTROL DRAWING**

## VIET POWER SOLUTIONS JSC (VPOWER RELIABILITY)

No. 8 Nguyen Cuu Van street, Ward 17,  
 Binh Thanh district, Ho Chi Minh city, Vietnam

Phone: +84 28 3899 1096

Fax: +84 28 3514 6752

Email : sales@vpower.com.vn

Web : vpower.com.vn

