

Q2A Series



VIBRATION ANALYSIS HARDWARE


2 Socket MIL-Style Connector with Grounded Backshell for Class I, Division 2 Locations, Polycarbonate Molded, Permanent Measurements, 250 °F (121 °C) Max Temp



Product Features

Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 2 Socket Connection
- ▶ 316L Stainless Steel Locking Ring

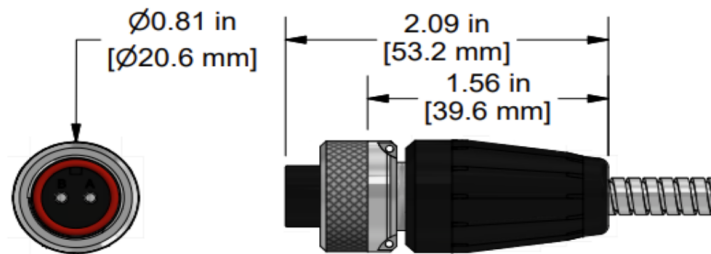

Specifications

Application	Permanent Mount
Max Temperature	250° F (121°C)
Connector Type	2 Socket MIL-Style
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Recommended Cables

CB190

Built to Order

VIET POWER SOLUTIONS JSC (VPOWER RELIABILITY)

No. 8 Nguyen Cuu Van street, Ward 17,
Binh Thanh district, Ho Chi Minh city, Vietnam

Phone: +84 28 3899 1096

Fax: +84 28 3514 6752

Email : sales@vpower.com.vn

Web : vpower.com.vn

